


15. ZAWÓR KULOWY DWUCZĘŚCIOWY

Przelot pełny, końcówki kołnierzowe DIN2633.
Uszczelnienie teflonowe. Ciśnienie PN16.

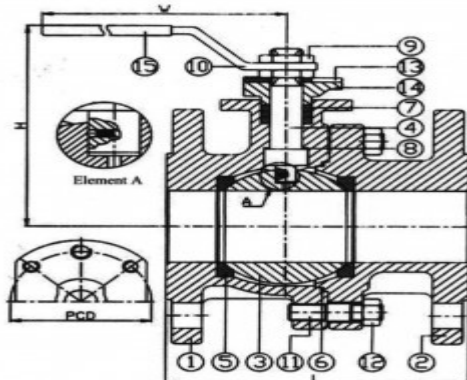

Średnica	L	H	W	PCD	kg/szt
1/2"	115	74	170	50	2,7
3/4"	120	77	170	50	3,1
1"	125	83	170	50	4,3
1 1/4"	130	88	170	50	6,2
1 1/2"	140	123	250	70	8,1
2"	150	132	250	70	10,0
2 1/2"	170	154	320	70	14,0
3"	180	166	365	102	18,5
4"	190	182	365	102	26,6
5"	325	225	500	125	54,0
6"	350	240	600	125	71,3
8"	400	310	700	140	155,0
10"	450	325	800	165	233,0
12"	500	365	900	165	